

Prism RL-PRISM-60-BK

Recessed Light

Product Finishes: ■



Specifications:

Voltage: 12V AC

Wattage: 1

Volt Amps: 1.5

Lumens: 11

Color Temp: 2700k

IP Rating: 67

CRI: 93

Light Source: Integrated

Beam Reach: 0.7m / 2.3'

Material: Polycarbonate

Cable Length: 36"

Foot candles (fc): 0.39

Candelas (cd): 5.2

Rated Life: 50,000 hours

Warranty: 7-year comprehensive

Dimmable: No

Color-Changing: No


Drive-Over Rated: Yes

Product Uses:


Decks, Pathways, Pavers,
Stairs, Risers, Concrete

Accessories:

Fang

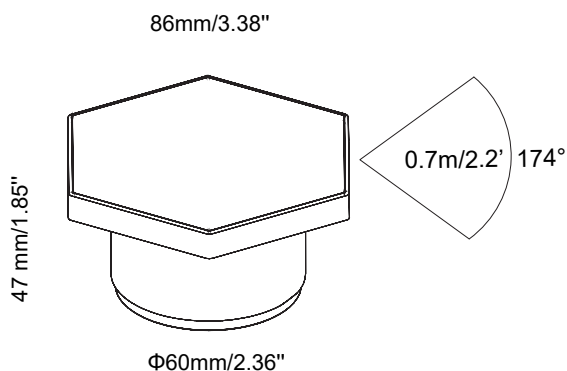

Max. Luminous intensity : 5.2 cd

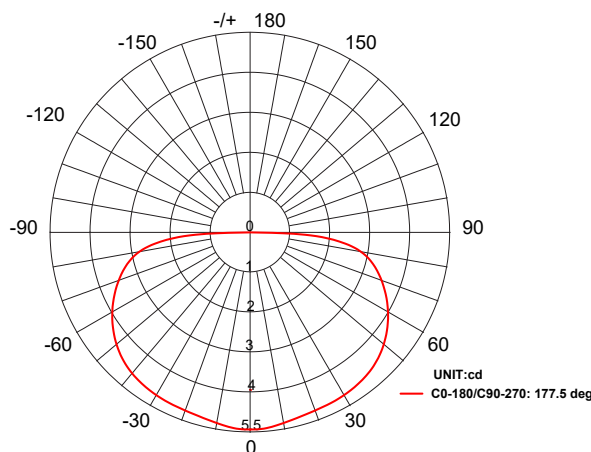

AVERAGE BEAM ANGLE 90/270 (50%): 174 DEG
AVERAGE BEAM ANGLE 0/180 (50%): 174 DEG

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	2.10/61.18		0.32
1.5	0.39/7.34		0.60
3	0.10/1.84		1.17
5	0.05/1.02		1.83
6.5	0.03/0.50		2.54

AVERAGE BEAM ANGLE 90/270 (50%): 178 DEG
AVERAGE BEAM ANGLE 0/180 (50%): 177 DEG



support@boldpros.com | 1-833-472-9960

boldpros.com