

PEERLUX<sup>®</sup>  
SERIES



# ITS





**PEERLESS<sup>®</sup>**  
electric-électrique

INCE | T | ON<sup>®</sup>  
PEERLESS CANADA

# CONCEPT

**LED luminaire** for **surface** or **suspended** installation with field adjustable aircraft cables or v-links for mounting chain. Rounded extruded ribbed frosted acrylic lens or polycarbonate frosted lens. Ideal for commercial environments or residential environments. Row mounting available, consult factory.

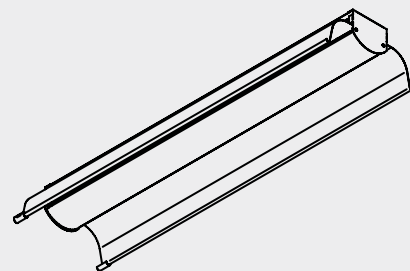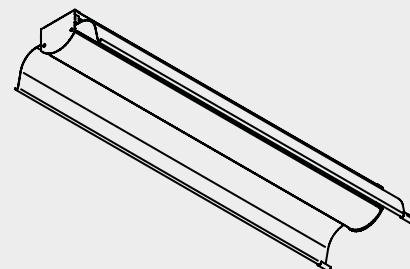

## CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards\*\*

Suitable for damp locations.




\*\*\*


\*LED Five (5) year limited warranty. \*\*\*Complies with Buy American Act.

\*\*Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.


Specifications are subject to change. Please confirm latest specifications prior to placing order.

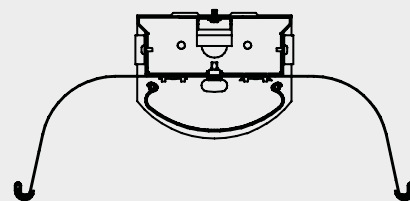


## STRUCTURE

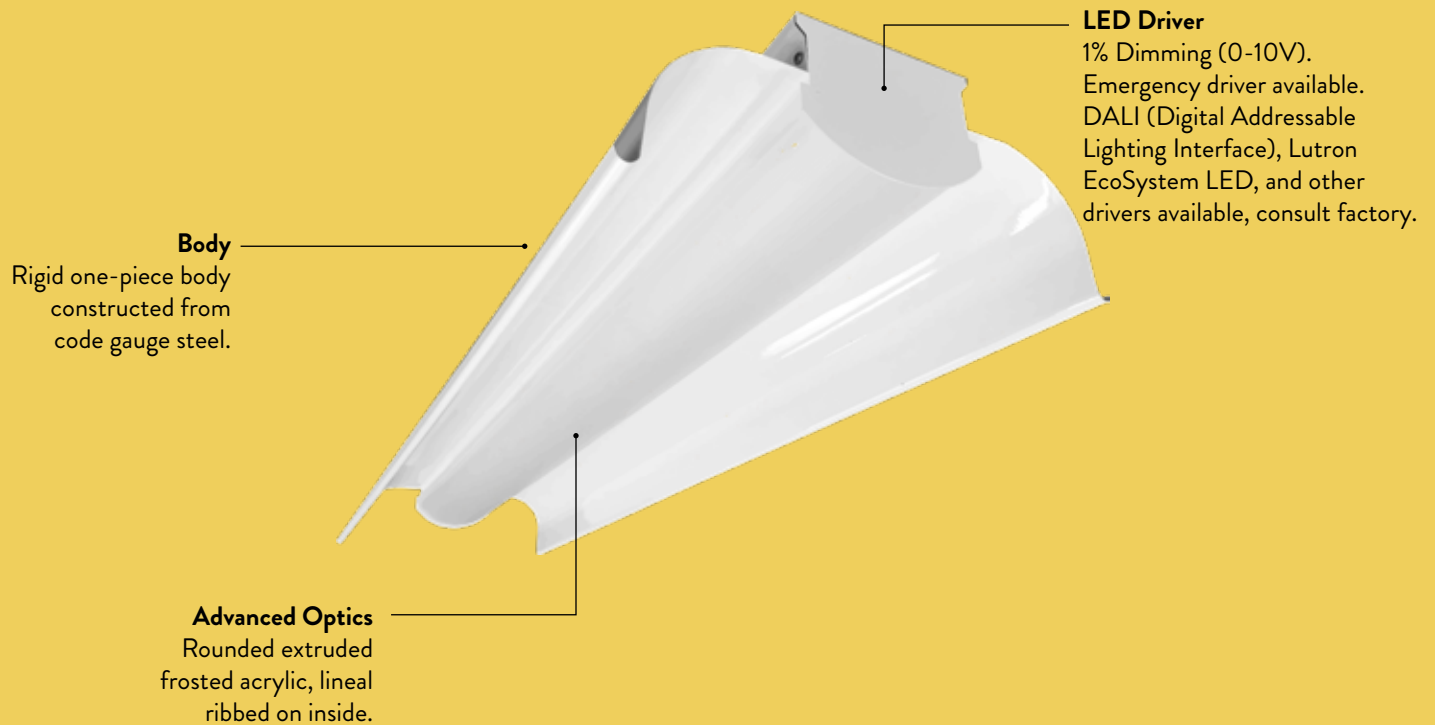

## MOUNTING

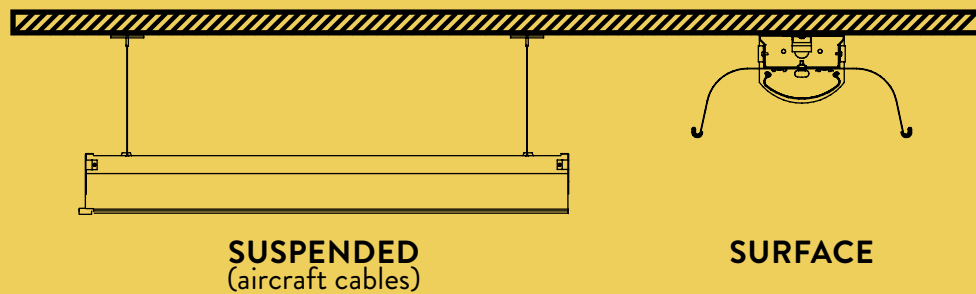


## PHOTOMETRIC DATA

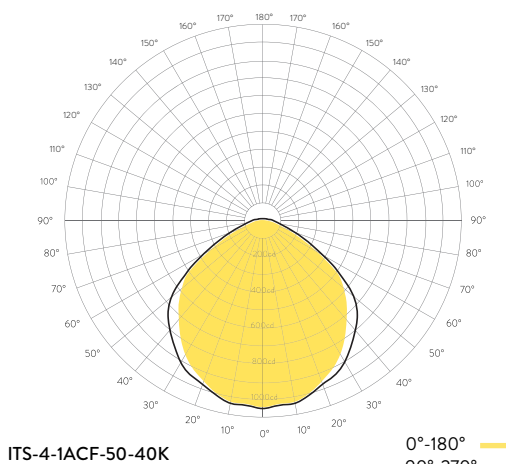




## DIMENSIONS

SIZE	L	W	H
4FT	48.00"	13.50"	6.25"

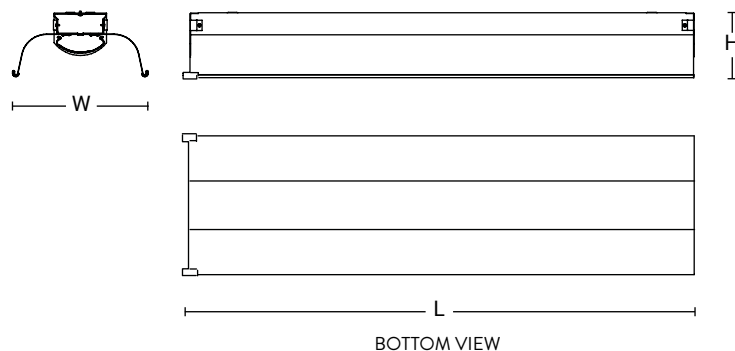

## ORDERING INFORMATION

ITS	4				W			
FIXTURE	LENGTH	STYLE	LUMENS	CCT	FINISH	CONTROLS *OPTIONAL*	MOUNTING *OPTIONAL*	DRIVER
ITS = Industrial LED Strip	4 = 4ft	<b>1ACF</b> = 1 Acrylic Frosted Lens  <b>1PCF</b> = 1 Polycarbonate Frosted Lens	<b>32</b> = 3200lm <b>40</b> = 4000lm <b>46</b> = 4600lm <b>60</b> = 6000lm <b>80</b> = 8000lm <b>100</b> = 10000lm *other lumens available	<b>30K</b> = 3000K <b>35K</b> = 3000K <b>40K</b> = 4000K <b>50K</b> = 5000K	<b>GLOSSY</b>  <b>W</b> = White	<b>OC</b> = On/Off Occupancy  <b>Control O5</b> = 100%-50% Hi/ Low Occupancy Control  <a href="#">Click here for suggested control options</a>	<b>A4-C1</b> = 48in Aircraft Cable & 5ft Cord  <b>A5-C2</b> = 60in Aircraft Cable & 6ft Cord  <b>A8-C4</b> = 96in Aircraft Cable & 9ft Cord  <b>A12-C7</b> = 144in Aircraft Cable & 13ft Cord	<b>MV</b> = Standard 120V-277V, 1% Dimming (0-10V)  <b>347</b> = Standard 347V Dimming (0-10V)  <b>EM</b> = Emergency Driver  <b>X</b> = DALI, Lutron EcoSystem LED, and other drivers available, consult factory



2900 Loyalist St.  
Cornwall, ON  
K6H 6C8  
T: 613.510.1268  
F: 613.510.1268

[info@peerless-electric.com](mailto:info@peerless-electric.com)  
[Peerless-Electric.com](http://Peerless-Electric.com)