

40W Linear Explosion-Proof Fixture

5000K | 2 ft | 120-277V

Suitable for hazardous environments where flammable gases, vapours, and liquids may exist. Also suited for wet locations, marine environments, and high vibration applications



UL Hazloc
C1, D2, (Groups A,B,C,D)
UL844, UL1598, UL 8750




Atex
II 2 G Ex db IIC T6 Gb

3 x 3/4" NPT
Conduit Entry Points
for added flexibility

IP66 Driver In
Separate Compartment
10KV surge protection

Rugged Die Cast
Aluminum Housing

Suspension Kit
Included

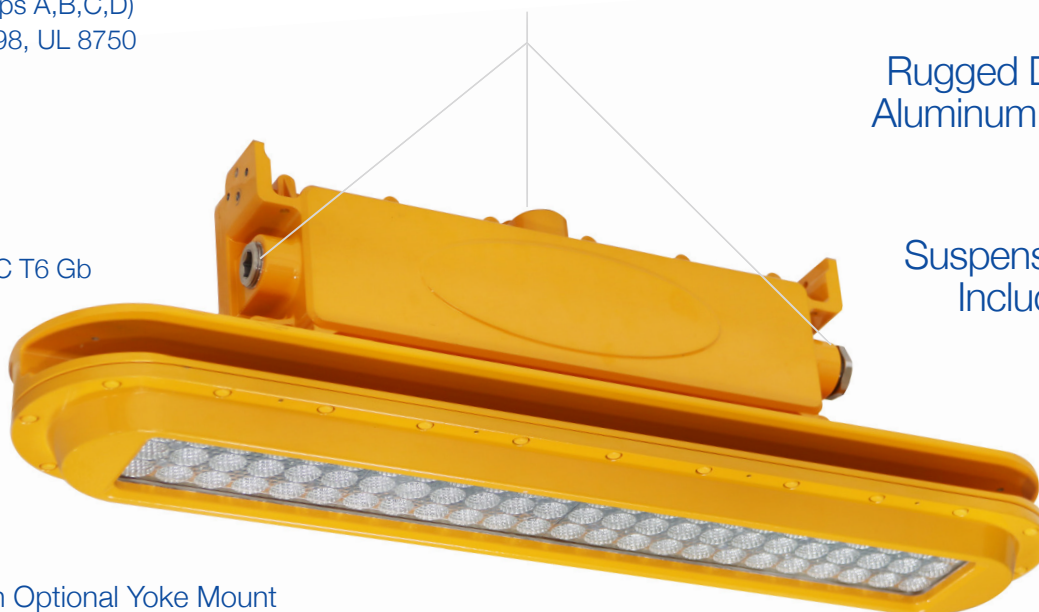

Pictured with Optional Yoke Mount
(EXPL-YK)



Tempered Glass Lens
allows for soft, uniform light

Faceted Reflectors
in each LED chip for glare
control and beam precision



Petrochemical
Processing



Mines



Paint
Booths



Docks
and Shipyards



Auto Shops



Yoke Mount
Ordered Separately
EXPL-YK

TECHNICAL DATA



LIGHT SPECIFICATIONS


Lumens	5,881 lm
Efficacy	130 lm/W
CCT	5000K
CRI	>70
L70 Life	50,000 hrs
Dimmable	Yes
Warranty	5-year

APPROVALS AND LISTINGS

cUL	E517285
-----	---------

DIMENSIONS

(Shown with Optional Yoke Mount)

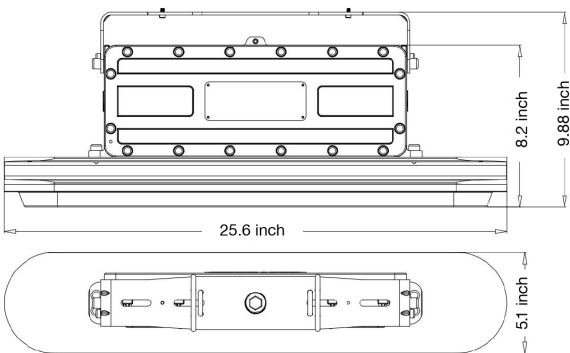

SUGGESTED SUBSTITUTION

EXPL-80W-4FT-50K

ELECTRICAL


Wattage	40W
Voltage	100-277V
Power Factor	0.99
THD	<20%
Operating Temp	-40 to 65°C

CONSTRUCTION

Housing	Aluminum
Cover	Glass
Finish	Orange
IP Rating	IP66
Length	2 ft
Net Weight	10.68 kg
Gross Weight	12.5 kg
Carton Qty	1
Carton Dimensions	760 x 220 x 305 mm

ACCESSORIES (Ordered Separately)

Wireguard	EXPL-WG-2FT
Yoke Mount	EXPL-YK

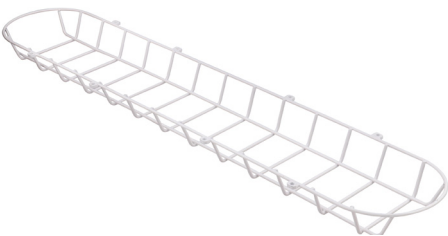

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833



ALBERTA WAREHOUSE
13 - 2355 52 Ave SE, Calgary, AB, T2C 4X7
ordersbc@csc-led.com | (403) 907 - 0212

BRITISH COLUMBIA OFFICE
1140 - 2375 Fremont St, Port Coquitlam, BC, V3B 0N9
ordersbc@csc-led.com | (778) 730 - 0448