# **PAGO**

### **OUTDOOR LED LIGHT**

## High Output Wedge Cut-Off Wall Pack | Power Switchable

The Pago series comes in a smooth matte design offering a high power and lumens to any dark outdoor spaces. Its IP65 offers great protection to outdoor environments making it suitable to be wall mounted above garages, warehouse facades and more.

Applications: Building facade | Pathway | Entrance



**TYPE** 

ACC. QTY

PROJECT		
PN		
ACCESSORY PN		
NOTES		

DATE

DYNAMIC MENU		
Order Information	Page 2	
Dimensions	Page 2	
Accessories	Page 3	
Photometric Data	Page 5	

#### Install Instruction link

### **SPECIFICATIONS**

Input Voltage	120-347V	
Power Factor	>0.9	
Total Harmonic Distortion	<20%	
Dimming	0-10V	
CRI	80 CRI	
сст	40K 50K	
Efficacy	~150 lm/W	
Power (W)	90/120/150	
Ambient Temperature Range	-40°C to 45°C	
Mounting Options	Wall Mount	
Fixture Finish	Black   Bronze	
Controls	Integrated Photocell Emergency Battery Back up Motion Sensor	
Protection	IP65 6kV Surge Protector	
Distribution	Туре 3	



#### **PRODUCT FEATURES**









#### PRODUCT CERTIFICATIONS







#### **SYSTEM WARRANTY** - 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

#### LUMEN MAINTENANCE - L70 at 100,000 hours


Rated for 70% initial lumen output at 100,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).


## **OUTDOOR LED LIGHT**


High Output Wedge Cut-Off Wall Pack | Power Switchable




## **ORDERING GUIDE**

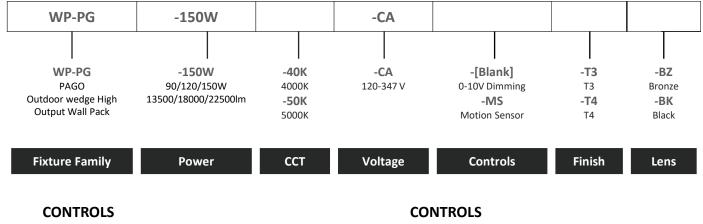





### **DIMENSIONS**

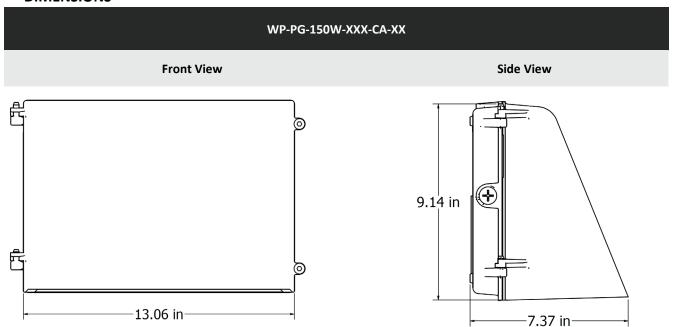

## **OUTDOOR LED LIGHT**

High Output Wedge Cut-Off Wall Pack | Power Switchable


### **ACCESSORIES**

## **MOTION SENSOR**


CODE	DESCRIPTION	PICTURE
AE-IL-SB2-CA-MOTIONSENSOR	Plug in low-voltage microwave motion sensor	
AE-IL-SB2-CA-REMOTE-CTRL	Remote control for the motion sensor	


## **Factory mode**

Factory Default Setting		
Sensitivity	100%	
Hold on time	5 min	
Daylight Sensor	ON	
Dimming level	30%	
Dimming time	30 min	



## **Area Coverage**





## **OUTDOOR LED LIGHT**

High Output Wedge Cut-Off Wall Pack | Power Switchable

## **ACCESSORIES**

### **EMERGENCY LED DRIVER**

## **AE-WP-ET-20W-EM-KIT**



SPECIFICATION		
Input Voltage	100-347Vac	
Power Frequency	50/60HZ	
Output Voltage	170V DC	
Ambient Temperature	0°C to 50°C /30°F to 122°F	
Output Power	20W	
Installation	Remote with exterior junction Box	

## **PHOTOCELL**


CODE	DESCRIPTION	PICTURE
LK-PC	Plug in photocell	


### **OUTDOOR LED LIGHT**

High Output Wedge Cut-Off Wall Pack | Power Switchable


### PHOTOMETRIC DATA

### T3 Lens

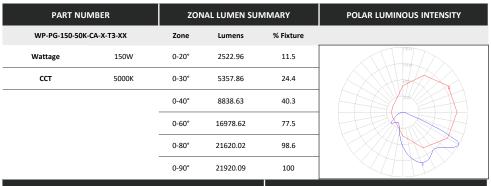

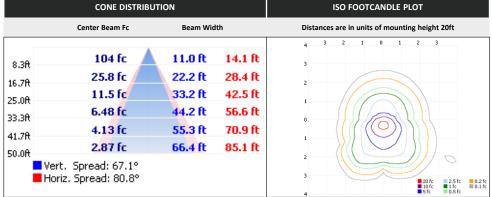

#### T4 Lens

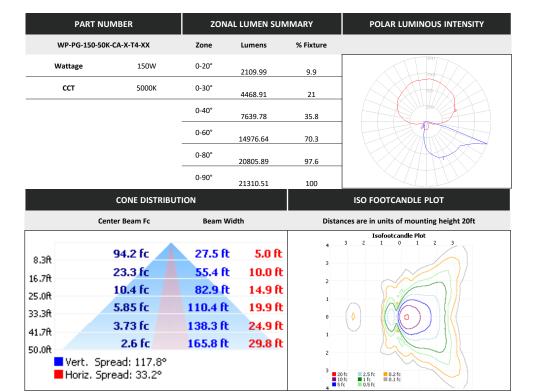



### **OUTDOOR LED LIGHT**

High Output Wedge Cut-Off Wall Pack | Power Switchable


### **OVERVIEW**



- Aluminum die cast housing and fins for better heat dissipation
- High and efficient output



- 40K and 50K CCT options
- **Power Switchable**







- Protected against dust ingress.
- Protected against water jets
- **6kV Surge Protector**









## Accessories

- photocell
- Integrated Emergency Battery Back up
- Plug in Motion sensor















