

# BS100LX

INDUSTRIAL

**Delivered Lumens:**  
9834 lm - 11592 lm


**Input Wattage:**  
80W, 100W

**Efficacy:**  
Up to 131 lm/W

**Colour Temperatures:**  
3000K, 3500K

**Projected Lumen Maintenance:**  
 $L_{85}$  @ >54,000 hrs.

The **BS100LX** features eight (8) closure clips that securely and evenly seal the luminaire

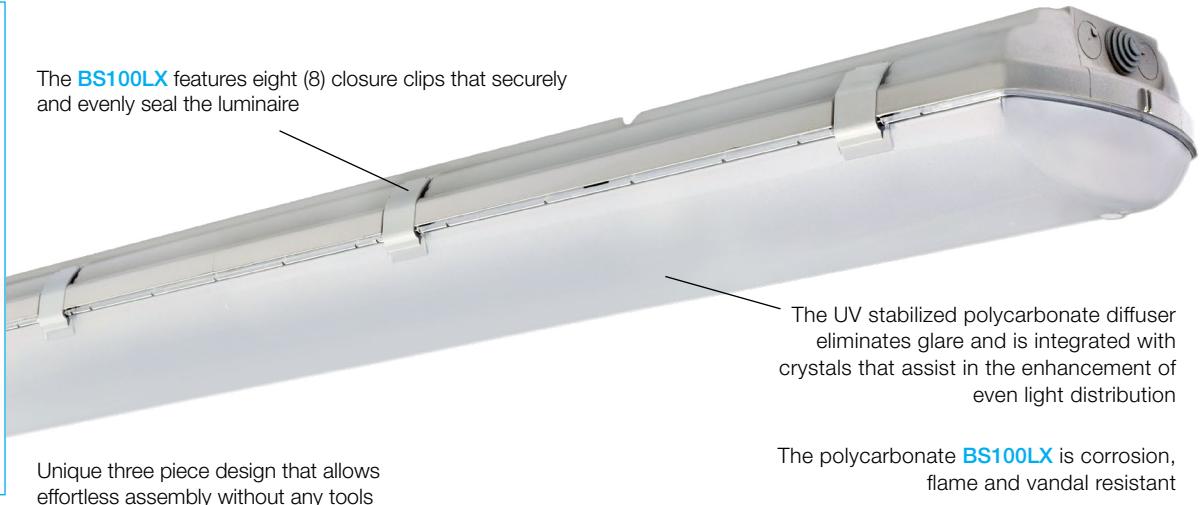

Unique three piece design that allows effortless assembly without any tools

The UV stabilized polycarbonate diffuser eliminates glare and is integrated with crystals that assist in the enhancement of even light distribution

The polycarbonate **BS100LX** is corrosion, flame and vandal resistant

The **BS100LX** is ideal for installation in parking garages, warehouses, breezeways, canopies, schools and much more.

## Configurations

MODEL	LENGTH	OPERATION	POWER	COLOUR TEMP	INPUT	MOUNTING	OPTIONS
BS100LX	4 (4ft)	[BLANK] (AC only)	L (10141 lm)	<sup>1</sup> 3K (3000K)	S (120-277V)	[BLANK] (surface mount - std.)	SS (stainless steel clips)
			H (11592 lm)	35K (3500K)	C (347V)	[BLANK] (chain hang kit - std.)	<sup>5</sup> IOS02 (microwave, internal, step-dimming, 120-347V (26' MH))
						AC (aircraft cable)	EOS03 (end mount 120-277V step dimming IP66)
						SPK (single pendant kit)	EOS04 (end mount 347V step dimming IP66)
						PM (pivot mount)	EOS05 (end mount 120-347V on/off sensor)
						<sup>2</sup> JM (direct mount to J-box)	EOS09 (end mount on/off 120-277V)
						MM (magnetic mount)	LOS03 (integral lens mount 120-277V step dimming IP66 on sensor)
							LOS04 (integral lens mount 347V step dimming IP66 on sensor)
							<sup>1</sup> LC (Line Cord)
							<sup>3</sup> CT (Cabtire cord)
							TLP (Twist lock plug)
							<sup>1</sup> FP (fuse protection)
							<sup>1</sup> EM (90 min emergency backup remote driver)
							<sup>2</sup> TP (4 tamper proof screws)
							SP (10kA surge protection)
							<sup>1</sup> BLK (Black housing)
							90 (90+ CRI)
							T 50°C High Temperature

**NOTE<sup>1</sup>:** EM, LC and FP are not available in 347V; **NOTE<sup>2</sup>:** longer lead time, contact factory; **NOTE<sup>3</sup>:** voids IP66 rating; **NOTE<sup>4</sup>:** must specify length: 6ft or 10ft; **NOTE<sup>5</sup>:** refer to Energy Chart for all LM output; **NOTE<sup>5</sup>:** Microwave occupancy sensor.

## BS100LX



BelLuce Canada Inc., 3900 14th Avenue, Unit 1, Markham, ON L3R 4R3 P: (905) 948-9500 F: (905) 948-8673 www.beluce.com

## Compatible Sensor Table

ORDERING GUIDE	BRAND	MODEL
EOS03	Acuity	SBOR-6-OEX-D
EOS04	Acuity	SBOR-6-OEX-D-HVOLT
EOS05	Wattstopper	HBP-112-L7-EM1-OEM
EOS06	Wattstopper	FSP-221B-D-L7-W
LOS03	Wattstopper	FSP-212-L7
LOS04	Wattstopper	FSP-221-L7

Compatible sensors can be ordered as options but will be shipped separately. Sensor brand is manufacturer's choice unless otherwise noted. If a compatible brand / type sensor is required please call for price.

## DLC ID Table

MODEL	DLC ID
BS100LX-4H3K	PU1VWJJ5
BS100LX-4H3K-T	PB5554UO
BS100LX-4L3K	POMEYUNK
BS100LX-4H35K	P9XBKRKK
BS100LX-4H35K-T	P108QGN9
BS100LX-4L35K	PP6NM3C0

## BS100LX Accessories

MODEL	DESCRIPTION
50001053	aircraft cable 50"
50001054	aircraft cable 72"
50001055	aircraft cable 100"
50001056	aircraft cable 150"
50001057	aircraft cable 200"
50001041	single pendant kit 12"
50001042	single pendant kit 18"
50001043	single pendant kit 24"
50001044	single pendant kit 36"
50001045	single pendant kit 48"
50001024	magnetic mounting
50001032	pivot mounting
JM	junction box mount

### HOUSING:

100% UV stabilized polycarbonate, liquid silicone perimeter gasket with memory retention.

### DIFFUSER:

Frosted UV stabilized polycarbonate diffuser, eliminates glare and provides even distribution.

### REFLECTOR:

Flat, steel reflector system finished in durable white powder coat. The reflector system holds all electrical components.

### ELECTRICAL:

Available in 3000K or 3500K colour temperatures. High efficiency driver operates 120V through 277V or 347V, 50-60HZ. L85 greater than 54,000 hours. SDCM 3.

### AC POWER CONNECTION:

3-wire, 18awg, pre-stripped 12" leads for quick in-field connection and hot load disconnect feature.

### WEIGHT:

10 lbs. / 4.5 kilo.

### MOUNTING:

Surface & chain mount configuration is standard with integrated stainless steel mounting brackets and chain hooks. Additional mounting systems are available: including aviation cable, pendants, magnetic, pivot and direct to junction box configurations.

### DIMMING:

0 - 10V dimming down to 1% is standard.

### EMERGENCY BACKUP (EM):

Remote mounted emergency backup with Ni-Cd batteries provides 2634 lumens for 90 minutes.

### OPERATING TEMPERATURE:

AC only: -40°C to 40°C

AC only (T): -40°C to 50°C

EM: 0°C to 50°C


### SANITATION LISTED:

Equivalent to the NSF standard 2 and is suitable for use in food equipment environments.

### WARRANTY:

5 year LED warranty, see website for full warranty details.

## Dimensions

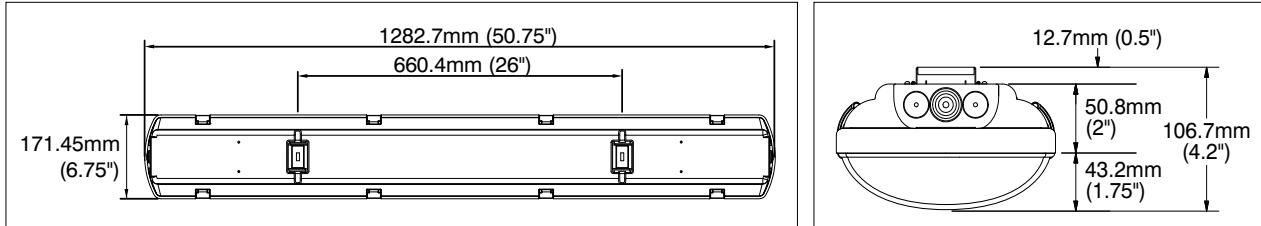

## Energy Chart

MODEL	LENGTH	COLOUR	EFFICACY	WATTAGE	LUMEN OUTPUT	CRI	REPORTED L85 (HOURS) <sup>1</sup>
BS100LX-4L-3K	4ft	3000K	127 lm/W	80	9834	80+	>54,000
BS100LX-4L-35K	4ft	3500K	131 lm/W	80	10141	80+	>54,000
BS100LX-4H-3K-T	4ft	3000K	118 lm/W	100	11241	80+	>54,000
BS100LX-4H-35K-T	4ft	3500K	121 lm/W	100	11592	80+	>54,000
BS100LX-4H-3K	4ft	3000K	121 lm/W	100	11241	80+	>54,000
BS100LX-4H-35K	4ft	3500K	125 lm/W	100	11592	80+	>54,000

NOTES: Actual performance may vary between +/- 5% of initial lumen output. NOTE<sup>1</sup>: Calculated as per TM-21-11. Limited by 6X LM80 test duration.

BS100LX



BeLuce Canada Inc., 3900 14th Avenue, Unit 1, Markham, ON L3R 4R3 P: (905) 948-9500 F: (905) 948-8673 www.beluce.com