



PRODUCT
CODE(S):

NOTES:

TYPE:

Interactive PDF. Click to type.

MARQUEE Canopy Lights

5 Power and 3CCT Selectable | 120-347V

Ideal for parking structures, gas stations, covered walkways, canopies, and more.
Featuring a hinged driver compartment and 4 conduit entries for installations requiring flexibility.

Power Selectable

20W / 40W / 55W / 65W / 75W

3CCT Selectable

3000K / 4000K / 5000K

120-347V Universal Driver

0-10V dimmable

Built-in Photocell

Hinged Driver Compartment

for easy wiring and installation

IK10 and IP65 Rated

4 Conduit Entries

for installations requiring flexibility

Available in White or Bronze
finishes with Round or
Square body styles



LIGHT SPECIFICATIONS AND ELECTRICAL



PRODUCT CODE	SELECTABLE WATTS	CCT	LUMENS	EFFICACY	V	CRI	FACTORY SETTINGS	MAX CURRENT
CPM-S-75W-5P-3CCT-UD-BZ CPM-S-75W-5P-3CCT-UD-WH CPM-R-75W-5P-3CCT-UD-BZ CPM-R-75W-5P-3CCT-UD-WH	20W	3000K	3299 lm	161 lm/W	120-347V	>80	75W 5000K	0.73A
		4000K	3485 lm	171 lm/W				
		5000K	3385 lm	167 lm/W				
	40W	3000K	6107 lm	160 lm/W				
		4000K	6411 lm	171 lm/W				
		5000K	6455 lm	170 lm/W				
	55W	3000K	9164 lm	154 lm/W				
		4000K	9815 lm	169 lm/W				
		5000K	9814 lm	164 lm/W				
	65W	3000K	10786 lm	152 lm/W				
		4000K	11354 lm	167 lm/W				
		5000K	11178 lm	159 lm/W				
	75W	3000K	11672 lm	148 lm/W				
		4000K	12595 lm	165 lm/W				
		5000K	12655 lm	159 lm/W				

SPECIFICATIONS & ELECTRICAL

Surge Protection	6kV
Auxiliary Output	12V
Power Factor	≥0.9
THD	<20%
Operating Temp	-40°C to 45°C
Operating Temp with Sensor	-40°C to 45°C
Beam Angle	135°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year


APPROVALS & RATINGS

cUL	E482965
CAN ICES-005	Yes
IP Rating	IP65
IK Rating	IK10


CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Powder Coat
Finish Colour	Bronze or White
Mounting Type	Surface Mount

PRODUCT FEATURES

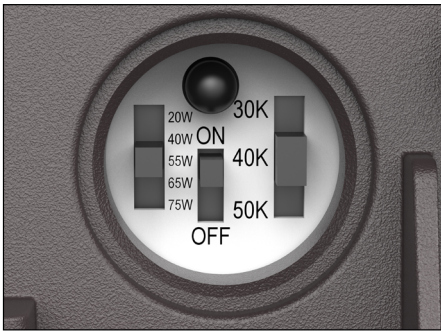

Power, CCT, and Photocell
Selector Switches

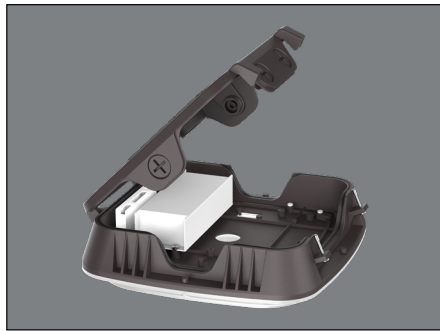

Hinged Driver Compartment for
Easy Wiring & Installation



Junction Box Mount with
Conduit Entries Available

ACCESSORIES (Sold Separately)


		SHADED CELLS INDICATE COMPATIBILITY	
PRODUCT NUMBER	PRODUCT NAME	CPM-S-75W-5P-3CCT-UD-BZ CPM-S-75W-5P-3CCT-UD-WH	CPM-R-75W-5P-3CCT-UD-BZ CPM-R-75W-5P-3CCT-UD-WH
MS04-MW-TW-DC*	Microwave Motion Sensor		
MS01-PIR-TW-DC*	PIR Motion Sensor		
MS04-RC	Motion Sensor Remote		
SPD07-10MV	Surge Protector		

*Requires Motion Sensor Remote (MS04-RC) for use

DLC INFORMATION


PRODUCT CODE	PRIMARY USE	DLC ID	CLASSIFICATION
CPM-S-75W-5P-3CCT-UD-BZ CPM-S-75W-5P-3CCT-UD-WH	Parking Garage Luminaires	S-L2SL3M	Premium
	Fuel Pump Canopy Luminaires	S-60VBLT	Premium
	Low-Bay Luminaires	S-F4RQ0F	Standard
CPM-R-75W-5P-3CCT-UD-BZ CPM-R-75W-5P-3CCT-UD-WH	Parking Garage Luminaires	S-S9TSGW	Premium
	Fuel Pump Canopy Luminaires	S-NK3HHD	Premium
	Low-Bay Luminaires	S-4Q4PFW	Standard

MEASUREMENTS (IN) & WEIGHTS (LBS)

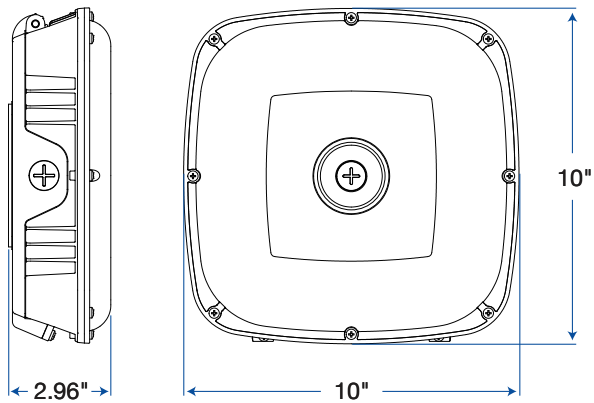

CPM-S-75W-5P-3CCT-UD-BZ
CPM-S-75W-5P-3CCT-UD-WH

Product Meas.	10" x 10" x 2.96"
Fixture Weight	4.85 lbs
Carton Qty	1
Carton G.W.	5.6 lbs
Carton Meas.	11" x 11" x 4"
Master Carton Qty	4
Master Carton G.W.	23.77 lbs
Master Carton Meas.	16.5" x 11.37" x 11.8"

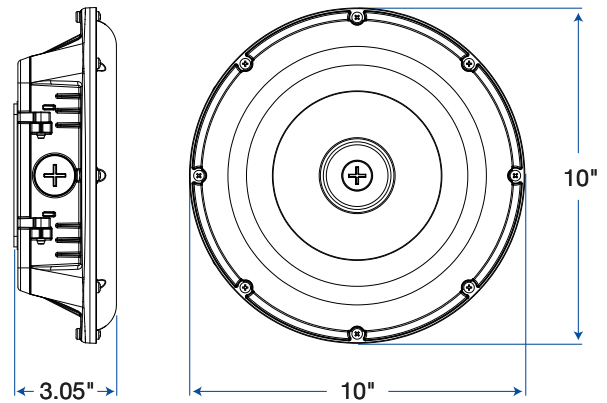

CPM-R-75W-5P-3CCT-UD-BZ
CPM-R-75W-5P-3CCT-UD-WH

Product Meas.	10" x 10" x 3.05"
Fixture Weight	4.31 lbs
Carton Qty	1
Carton G.W.	4.99 lbs
Carton Meas.	10.75" x 10.88" x 4"
Master Carton Qty	4
Master Carton G.W.	21.75 lbs
Master Carton Meas.	16.75" x 11.4" x 11.5"

BRITISH COLUMBIA

1140-2375 Fremont St, Port Coquitlam,
BC V3B 0N9 | (778) 730-0448

ALBERTA

13-2355 52 Ave SE, Calgary, AB
T2C 4X7 | (403) 907-0212

ONTARIO

8-540 Jamieson Pkwy, Cambridge, ON
N3C 0G5 | (519) 880-9833