



AHM



PEERLESS®
electric·électrique

INCEPTION®

PEERLESS CANADA

CONCEPT

LED luminaire for **surface** or **suspended** installation with aircraft cables. Wide acrylic lens, ribbed on the inside with a rigid one-piece body constructed from code gauge steel. Ideal for commercial environments. Row mounting available.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**

Suitable for damp locations.




*LED Five (5) year limited warranty. ****Complies with Buy American Act.

**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.


Specifications are subject to change. Please confirm latest specifications prior to placing order.



STRUCTURE

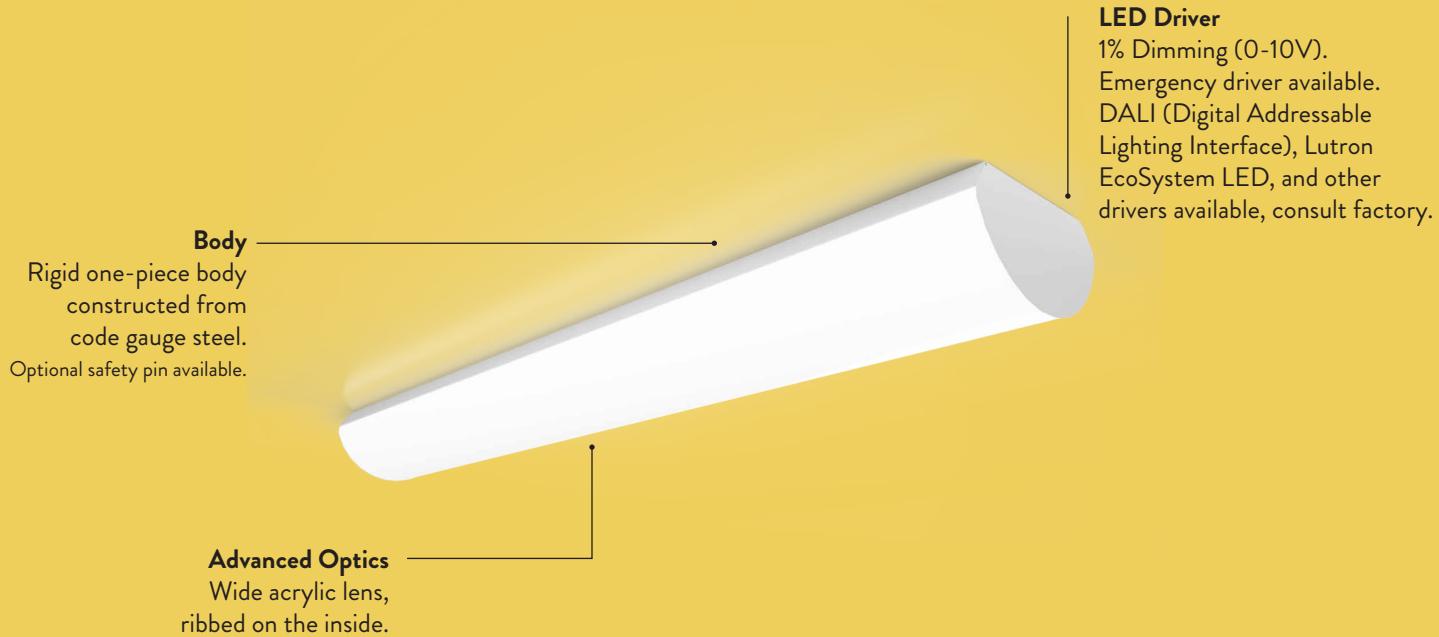

MOUNTING

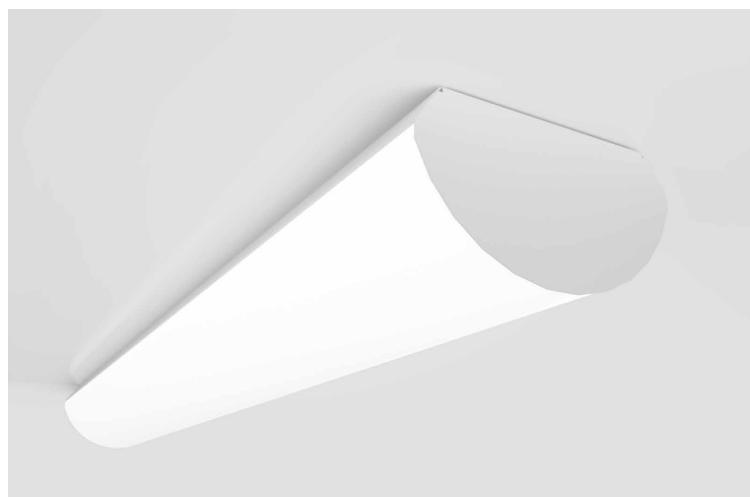




HALF MOON DESIGN

Elegantly designed after the half moon phase, the AHM profile gives a added charm to any space. Using advanced LED engines, it provides wide spread downlight, delivering both efficient and comfortable illumination.



PHOTOMETRIC DATA

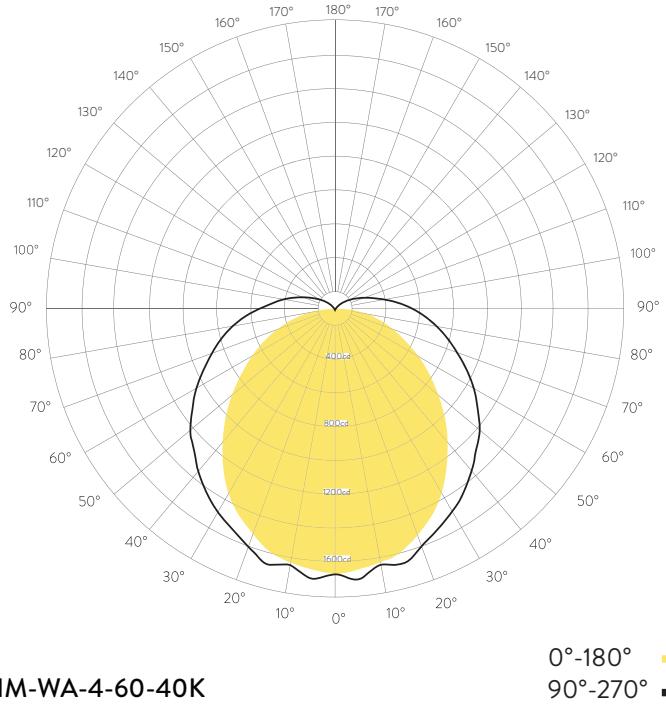

AHM-WA-4-60-40K

0°-180° —
90°-270° —

Available in 3000K, 3500K, 4000K and 5000K preset CCT




OR
AS TUNABLE WHITE




COLOR

Standard finish is matte white polyester baked powder coat enamel. Matte grey and black available.

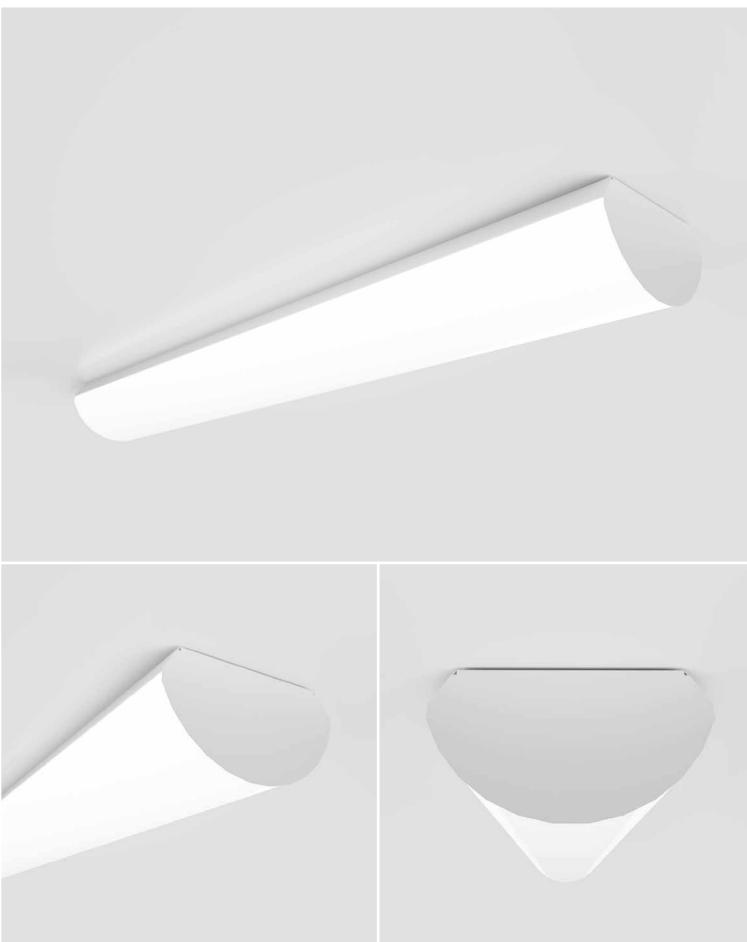

DIMENSIONS

SIZE	L	W	H	MTG L	MTG W
2FT	23.00"	7.50"	4.10"	16.00"	4.75"
4FT	46.00"	7.50"	4.10"	39.00"	4.75"

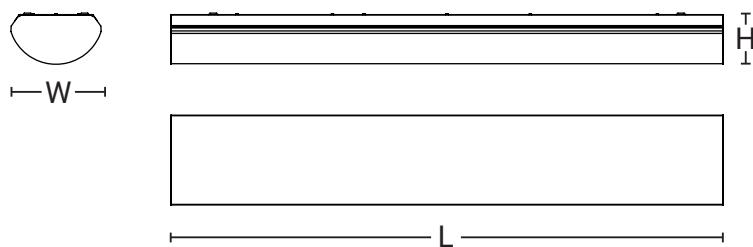

BOTTOM VIEW

ORDERING INFORMATION

AHM	WA								
Fixture	Shielding	Length	Lumens	CCT	Finish	*Option*	Mounting *Optional*	Power Cord *Optional*	Driver
AHM = Architectural . Half . Moon	WA = Wide Acrylic Lens	2 = 2ft	15 = 1500lm 30 = 3000lm 40 = 4000lm	30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K TW = Tunable White *Other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory	MATTE WM = White Housing BM = Black Housing GM = Grey Housing	SP = Safety Pin (Tamper Resistant Thumb Screws)	A4 = 48in Aircraft Cable A5 = 60in Aircraft Cable A8 = 96in Aircraft Cable A12 = 144in Aircraft Cable	C1 = 5ft Cord C2 = 6ft Cord C4 = 9ft Cord C7 = 13ft Cord	MV = Standard 120V-277V, 1% Dimming (0-10V) 347 = Standard 347V Dimming (0-10V) EM = Emergency Driver X = DALI, Lutron EcoSystem LED, and other drivers available, consult factory
		4 = 4ft	30 = 3000lm 60 = 6000lm 80 = 8000lm						



2900 Loyalist St.
Cornwall, ON
K6H 6C8
T: 613.510.1268
F: 613.510.1268

info@peerless-electric.com
Peerless-Electric.com