

# LED ADJUSTABLE WALL PACKS

## FIELD SELECTABLE



90° Adjustable Head



**SELECT**



**TWO FIELD  
SELECTABLE MODELS:  
WATTAGE AND CCT**

**90° ADJUSTABLE HEAD**

**RANGE VOLTAGE 120V-277V**

**INTEGRATED BYPASSABLE  
PHOTOCELL**

**SUGGESTED APPLICATIONS**

- Walkways
- Warehouses
- Office Buildings
- Schools
- Hospitality

Engineered for directional performance and on-site flexibility, these LED Adjustable Wall Packs deliver targeted outdoor illumination with precision control. Offered in small and large configurations, each fixture features its own dedicated wattage package and is field selectable—allowing you to choose from three wattages and three color temperatures at installation to match your exact project requirements. The adjustable head rotates up to 90°, directing light exactly where it’s needed for enhanced coverage and improved visibility. A built-in, bypassable photocell enables convenient dusk-to-dawn operation, while select dimmer compatibility supports additional energy management and customization. Constructed from durable die-cast aluminum with a corrosion-resistant bronze finish and an impact-resistant polycarbonate lens, these fixtures are built for long-term reliability in demanding environments.

<b>120-277V</b>	<b>0-10V DIMMING</b>	<b>WET LOCATION</b>	<b>IP 65</b>	<b>IK 08</b>	<b>50,000 HOURS</b>	<b>5 YEAR WARRANTY</b>	<b>TRUSTED NB WARRANTY</b>
-----------------	----------------------	---------------------	--------------	--------------	---------------------	------------------------	----------------------------

**GENERAL SPECIFICATIONS**

**Input Voltage:** 120V-277V  
**Frequency:** 50/60Hz  
**Power Factor:** >0.9  
**Beam Spread:** 65°x95°  
**Dimmable:** 0-10V Dimmable Down to 20%  
**Surge Protection Rating:** 4kV  
**Integrated Photocell:** Bypassable  
**Efficacy:** up to 162 LPW  
**CRI:** 80+  
**CCT Selectable:** 3000K/4000K/5000K

**Location Rating:** Wet  
**IP Rating:** IP65  
**IK Rating:** IK08  
**Ambient Operating Temperature:** -40°C (-40°F) to +40°C (+104°F)  
**Mounting Options:** Wall  
**Construction:** Die-Cast Aluminum  
**Finish:** Bronze  
**Lens:** Impact Resistant Polycarbonate  
**Functional Life:** 50,000 Hours  
**Warranty:** 5 Years





**ITEM SPECIFICATIONS / ORDER INFO**


Item	Max Lumens	Wattage Selectable	HID Replacement Wattage	Input Current @120V/277V	THD%	DLC ID
65-943	3669	25W/20W/15W	70W-100W	0.13-0.05/0.17-0.07/0.21-0.09A	9.70%	S-3RBQDR
65-944	11264	80W/60W/45W	100W-250W	0.38-0.16/0.50-0.22/0.67-0.29A	9.81%	S-BZVW67

**DIMENSIONS / WEIGHTS**

Item	Width (A)	Height (B)	Extends (C)	Weight
65-943	6.50"	3.84"	8.08"	3.31 Lbs.
65-944	8.50"	4.41"	11.04"	4.96 Lbs.

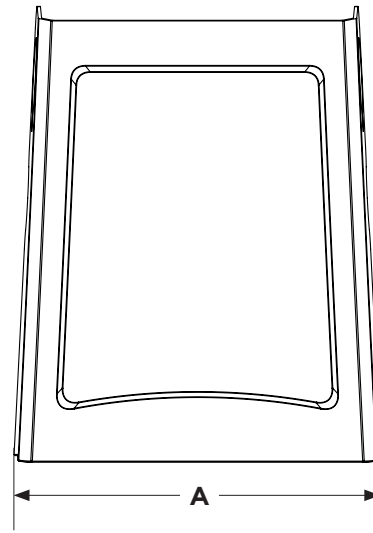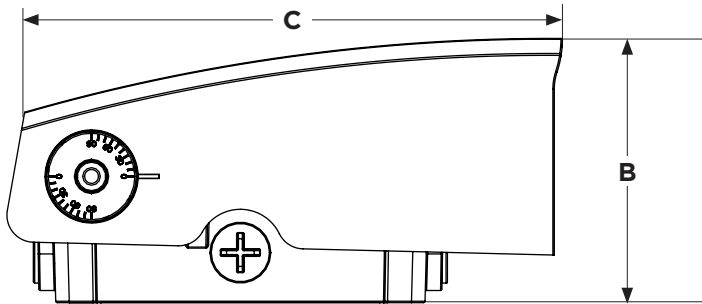

**FEATURES**

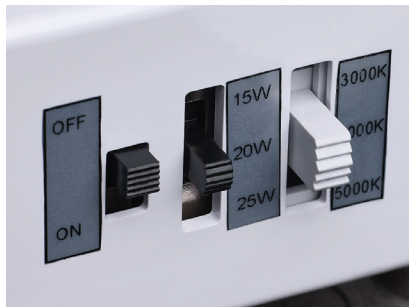

CCT Selectable Switch  
 Wattage Selectable Switch  
 Photocell On/Off Switch



Integrated Bypassable Photocell



90° Adjustable Head

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Meets requirements of ICES-005 issue 5 Class A Commercial applications.

See [satco.com](http://satco.com) for a list of compatible dimmers.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

Visit [satco.com/service/warranty](http://satco.com/service/warranty) for complete warranty details.