

PrentaLux



Fluxyn Series

ROUND RING DISC

MODULAR SURFACE MOUNT DECORATIVE FIXTURES




SM4-01 6" Round
Brass Trim Color
Clear Diffuser Color
Iced Out Diffuser Texture




SM4-01 6" Round
Brass Trim Color
Clear Diffuser Color
Vertical Fluted Diffuser Texture



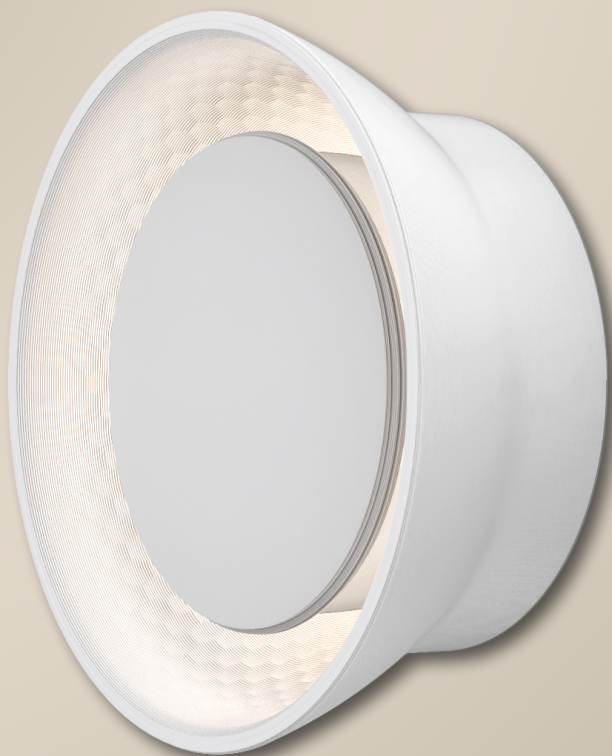

SM4-02 8" Ring

White Outer Shade & Front Plate Color
White Inner Shade Color
Hammered Inner Shade Texture

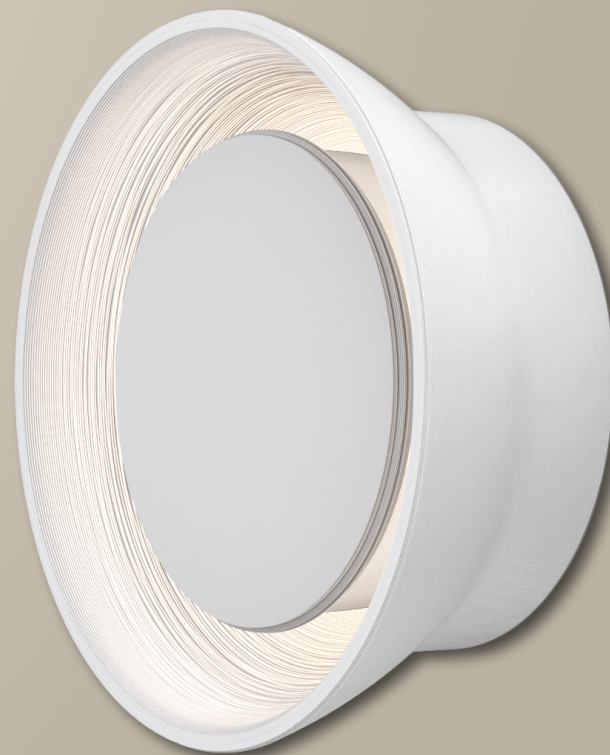

SM4-02 8" Ring

White Outer Shade & Front Plate Color
White Inner Shade Color
Natural Lines Inner Shade Texture



206






SM4-03 8" Disc
 Bronze Outer Shade Color
 Bronze Inner Shade Color
 Wavy Inner Shade Texture
 Open Cylinder Diffuser



SM6-03 14" Disc
 Bronze Outer Shade Color
 Bronze Inner Shade Color
 Natural Lines Inner Shade Texture
 Open Tapered Diffuser



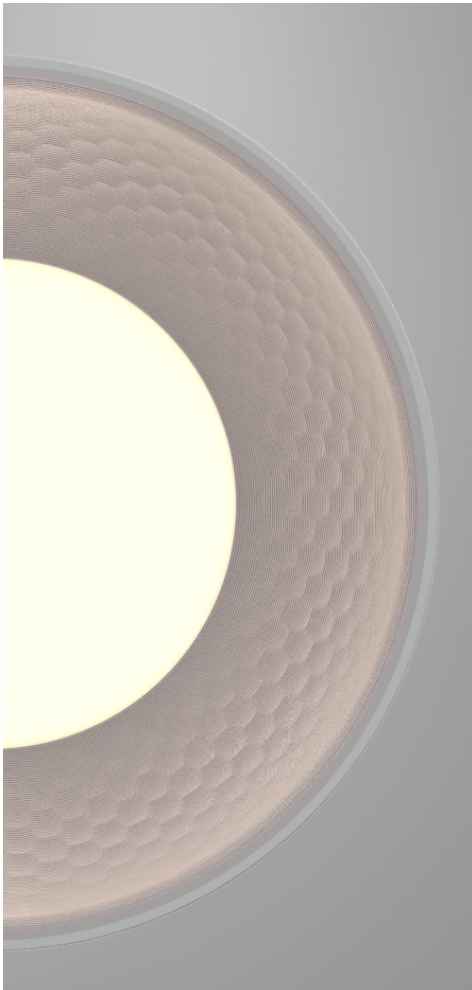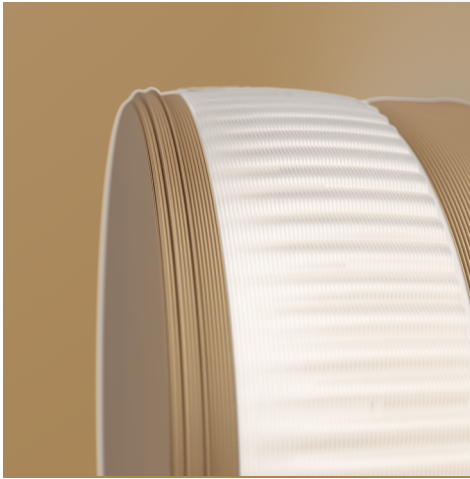

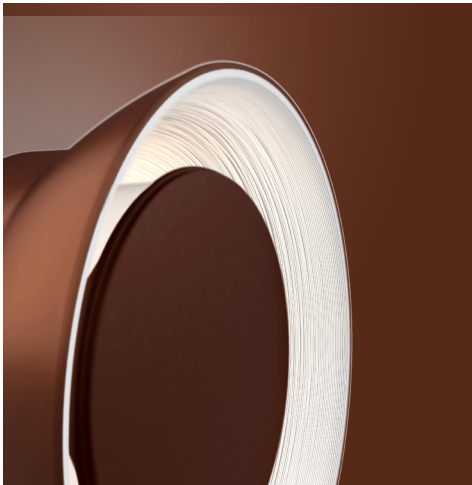




6" ROUND

Top Product Features

- The PentaLux Fluxyn series of performance decorative fixtures utilize Cooper Lighting's proprietary 3D printing technology
- Integral LED light engine with 650/800/1000 nominal source lumens
- Surface Wall (Sconce) or Surface Ceiling Mounted
- 6-Position Switch: 5-color Field-SeleCCTable (2700K, 3000K, 3500K, 4000K, 5000K) + Dim-to-Warm (3000K dims to 1800K); 90+ CRI
- Phase Cut Dimming: Continuous, flicker-free dimming from 100% to 5% with compatible leading or trailing edge (LE/TE) phase cut dimmers
- 0-10V Dimming: Continuous, flicker-free dimming from 100% to 5% with compatible 0-10V dimmers
- Light engine is AIR-TITE, wet location-listed, IC-rated




Standard Trim Colors

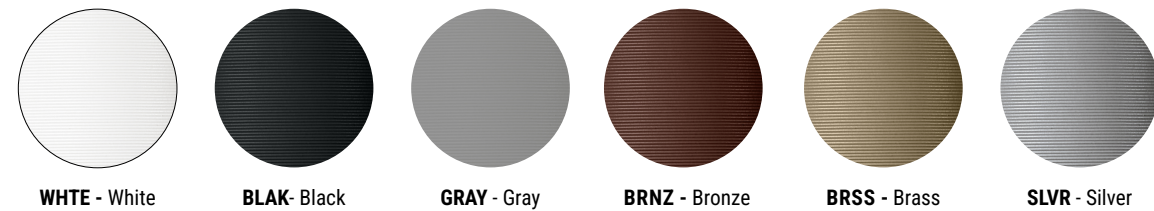


Standard Diffuser Colors



Diffuser Textures

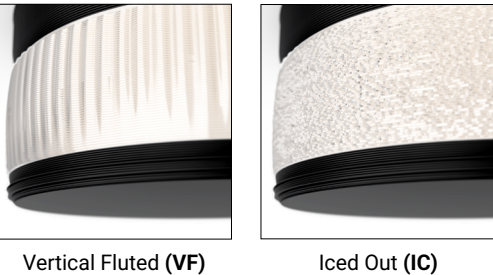

	6" Round
Light Engine	4" Integral LED Light Engine
Source Lumens	Lumen Selectable: 650/800/1000lm
CRI	90+ CRI
CCT	Field Selectable CCT: Dim-to-Warm/2700/3000/3500/4000/5000K
Dimming	Phase Cut LE/TE 5%, 120V or 0-10V 5%, 120-277V
Mounting	Ceiling Flush Mount or Wall Sconce
Dimensions	ø5.97" x 2.98"

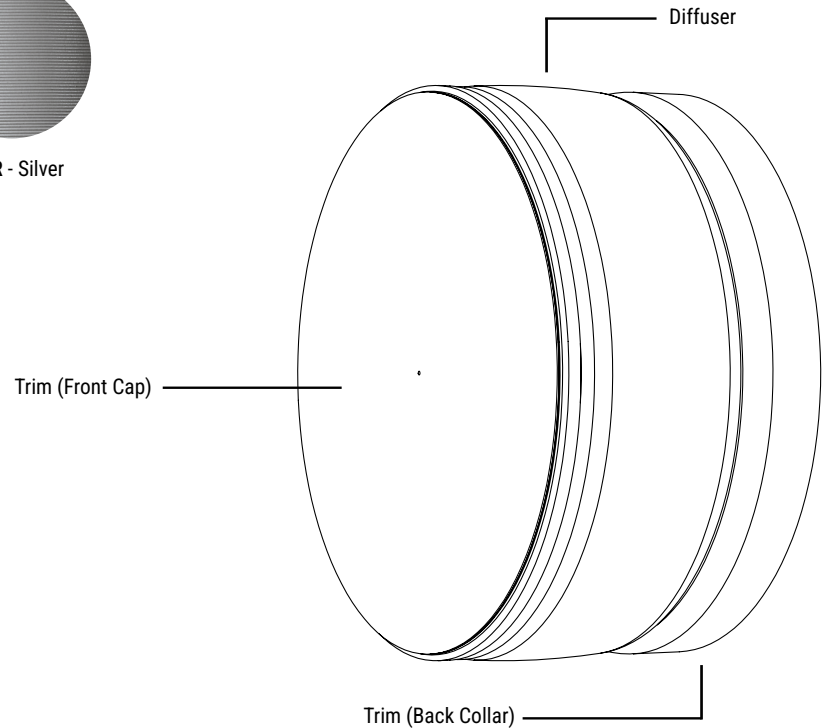




8" RING

Top Product Features

- The PrentaLux Fluxyn series of performance decorative fixtures utilize Cooper Lighting's proprietary 3D printing technology
- Integral LED light engine with 650/800/1000 nominal source lumens
- Surface Wall (Sconce) or Surface Ceiling Mounted
- 6-Position Switch: 5-color Field-SeleCCTable (2700K, 3000K, 3500K, 4000K, 5000K) + Dim-to-Warm (3000K dims to 1800K); 90+ CRI
- Phase Cut Dimming: Continuous, flicker-free dimming from 100% to 5% with compatible leading or trailing edge (LE/TE) phase cut dimmers
- 0-10V Dimming: Continuous, flicker-free dimming from 100% to 5% with compatible 0-10V dimmers
- Light engine is AIR-TITE, wet location-listed, IC-rated




Standard Outer Shade/Front Plate Colors



WHITE - White




BLAK- Black




GRAY - Gray



BRNZ - Bronze




BRSS - Brass



SLVR - Silver


Standard Inner Shade Colors



WHITE - White




BLAK- Black




GRAY - Gray



BRNZ - Bronze




BRSS - Brass



SLVR - Silver

Inner Shade Textures



Hammered (HM)




Natural Lines (NL)



Wavy (WV)

	8" Ring
Light Engine	4" Integral LED Light Engine
Source Lumens	Lumen Selectable: 650/800/1000lm
CRI	90+ CRI
CCT	Field Selectable CCT: Dim-to-Warm/2700/3000/3500/4000/5000K
Dimming	Phase Cut LE/TE 5%, 120V or 0-10V 5%, 120-277V
Mounting	Ceiling Flush Mount or Wall Sconce
Dimensions	ø7.85" x 3.21"

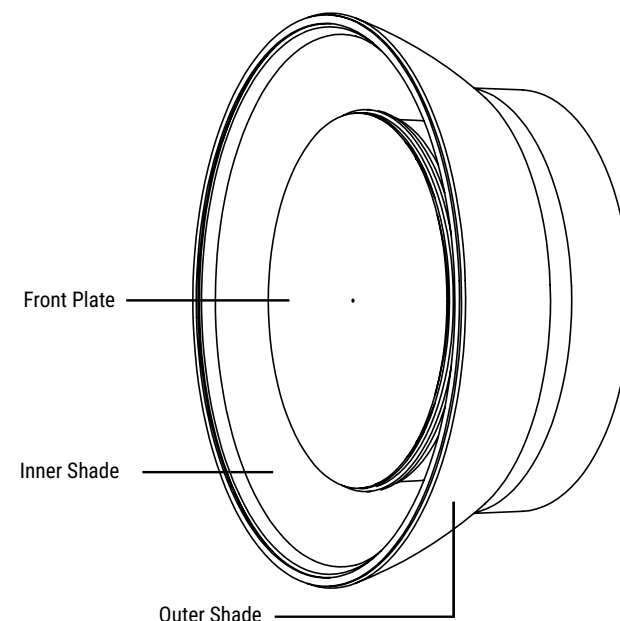



8" DISC




14" DISC

Top Product Features

- The PentaLux Fluxyn series of performance decorative fixtures utilize Cooper Lighting's proprietary 3D printing technology
- Integral LED light engine with 650/800/1000 or 750/900/1200 nominal source lumens
- Surface Ceiling Mounted or Surface Wall (Sconce)
- 6-Position Switch: 5-color Field-SeleCCTable (2700K, 3000K, 3500K, 4000K, 5000K) + Dim-to-Warm (3000K dims to 1800K); 90+ CRI
- Phase Cut Dimming: Continuous, flicker-free dimming from 100% to 5% with compatible leading or trailing edge (LE/TE) phase cut dimmers
- 0-10V Dimming: Continuous, flicker-free dimming from 100% to 5% with compatible 0-10V dimmers
- Light engine is AIR-TITE, wet location-listed, IC-rated




Standard Outer Shade Colors



WHITE - White




BLAK- Black




GRAY - Gray



BRNZ - Bronze



BRSS - Brass



SLVR - Silver


Standard Inner Shade Colors



WHITE - White



BLAK- Black




GRAY - Gray



BRNZ - Bronze



BRSS - Brass



SLVR - Silver

Inner Shade Textures



Hammered (HM)



Natural Lines (NL)



Wavy (WV)

Diffuser Options



Open Tapered (OT)




Open Cylinder (OC)



No Diffuser (ND)

	8" Disc	14" Disc
Light Engine	4" Integral LED Light Engine	6" Integral LED Light Engine
Source Lumens	Lumen Selectable: 650/800/1000lm	Lumen Selectable: 750/900/1200lm
CRI	90+ CRI	90+ CRI
CCT	Field Selectable CCT: Dim-toWarm/2700/3000/3500/4000/5000K	Field Selectable CCT: Dim-toWarm/2700/3000/3500/4000/5000K
Dimming	Phase Cut LE/TE 5%, 120V or 0-10V 5%, 120-277V	Phase Cut LE/TE 5%, 120V or 0-10V 5%, 120-277V
Mounting	Ceiling Flush Mount or Wall Sconce	Ceiling Flush Mount or Wall Sconce
Dimensions	ø7.85" x 3.21"	ø13.94" x 4.26"

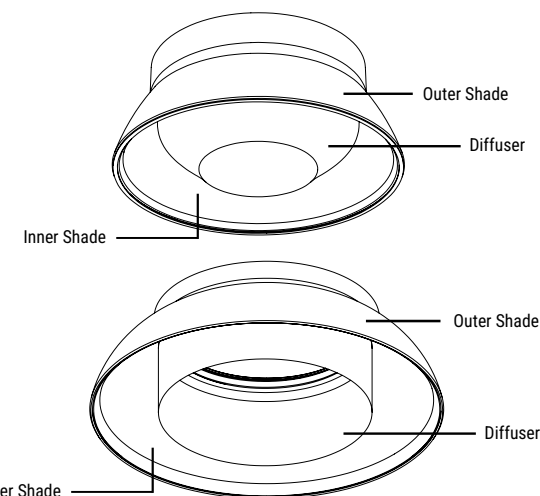

Lighting Product Lines

Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
Halo
Halo Commercial
Invue
iO
IRiS
Lumark
Lumière
McGraw-Edison
Metalux
MWS
NeoRay
Portfolio
PrentaLux
RSA
Shaper
Streetworks
Sure-Lites

Controls Product Lines

Fifth Light Technology
Greengate
iLight (International Only)
iLumin
Zero 88

Connected Lighting Systems

Distributed Low-Voltage Power
HALO Home
iLumin Plus
LumaWatt Pro
Trellix
WaveLinx

PrentaLux



Cooper Lighting Solutions
www.cooperlighting.com
For service or technical assistance:
1.800.553.3879

© 2026 Cooper Lighting Solutions
All Rights Reserved
Publication No. BR53163726EN
August 24, 2026 12:26 PM

Cooper Lighting Solutions is a registered trademark.
All other trademarks are property of their respective owners.
Product availability, specifications, and compliances are subject
to change without notice.