LEORA SERIES

LEORA is a premium architectural LED downlight available in 3in and 4in apertures. It features power-selectable wattages, 5CCT selectable or Dim-to-Warm technology, multiple beam distributions, wall wash optics, and trim or trimless configurations. The result is exceptional visual comfort, and a clean architectural aesthetic.

Art Galleries | Show Rooms | Retail Stores | Hospitality

Project Information

Type: Date:

Project:

Catalog #:

Notes:



Key Specifications

Electrical

Input voltage	**120-277/347V**
Power factor	**> 0.9**
THD	**< 20%**
Dimming	**0-10V (down 1%)**
Power	**13-30W**

Optical

Lumen range	**1350-2600lm**
Efficacy	**105lm/W**
CRI	**90**
CCT	**Switchable 27K–50K · DTW 20K-30K**
Distribution	**24° · 38° · 55° · WW**

Physical

Aperture	**3 · 4in**
Shape	**Round · Square · Trimless**
Mounting	**New construction · Retrofit · Mud-in**
Reflector	**Black · White · Silver**
Ambient	**–20°C to 40°C**
Application	**Wet location · Air tight IC rated (3in-13W, 4in-20W)**
Accessories	**Optics · Frame kit · EMBB · Sensor**

Certifications

Listings	**cETLus · FCC ROHS**

System Warranty

5 years

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

Lumen Maintenance

L80 at 100000h

Rated for 80% initial lumen output at 100000h of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.

Ordering Guide - Fixture

Assembled Catalog Number

RESET

DL-LR

Catalog #:

01	FIXTURE FAMILY	**DL-LR** Leora			
02	SIZE	**-3** 3in	**-4** 4in		
03	POWER	**-21W** **13/21W** 21W	**-30W** **20/30W** 30W		
04	SHAPE	**-R** Round	**-S** Square		
05	CCT	**2700/3000/4000/5000** K **-5CCT** 27/30/35/40/50K	**2000-3000** K **-DTW** 20-30K		
06	DISTRIBUTION	**-24** 24 degrees	**-38** 38 degrees	**-55** 55 degrees	**-WW** Wall Wash
07	REFLECTOR FINISH	**-B** Black Reflector	**-W** White Reflector	**-S** Silver Reflector	
08	TRIM FINISH	**-B** Black Trim	**-W** White Trim	**-S** Silver Trim	
09	TRIM STYLE	**T** Trim	**WTL** White Trimless		

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.

Ordering Guide - Fixture (continued)

SIZE	POWER	IC RATED	LUMENS
3in	**13W**	**IC Rated**	**1350lm**
3in	**21W**	**Non IC Rated**	**2200lm**
4in	**20W**	**IC Rated**	**2100lm**
4in	**30W**	**Non IC Rated**	**2800lm**

0-10V dimming (dim down to 1%)
Wall wash distribution only available with Trimless and round configurations

Accessory Ordering Guide

DOWNLIGHT FRAME KIT

Assembled Catalog Number

RESET

AE-DL-FRKT

Catalog #:

01 SHAPE

- **Blank** — Round
- **-UNA** — UNA series

02 SIZE

- **-03** — 3in
- **-04** — 4in

03 TYPE

- **-UNV** — Universal
- **-PFP** — Plaster Frame Plate

04 INFINITA

- **Blank** — Empty

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.

Accessory Ordering Guide

EMERGENCY BATTERY LOWBAY DOWNLIGHT

Assembled Catalog Number

RESET

BLD-HM

Catalog #:

01 POWER

8D-YYY	15D-YYY	
8W 8W	15W 15W	

LEORA LOUVER

Assembled Catalog Number

RESET

DL-LR

Catalog #:

01 SIZE

-3	-4
3in	4in

02 TYPE

-COMB
Honey Comb Louver

LEORA LOUVER

Assembled Catalog Number

RESET

DL-LR

Catalog #:

01 SIZE

-3	-4
3in	4in

02 TYPE

-LINEARLENS
Linear Lens

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.

Accessory Ordering Guide (continued)

LEORA LOUVER

Assembled Catalog Number

RESET

DL-LR

Catalog #:


01 SIZE

-3	-4
3in	4in


02 TYPE

-SOLITELENS
Solite Lens


Dimensions

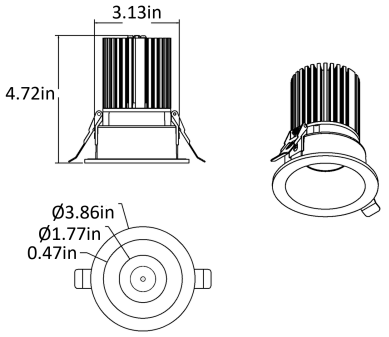


DL-LR-3-21W-R-XXX-XX-X-X-T Leora 3in round with trim

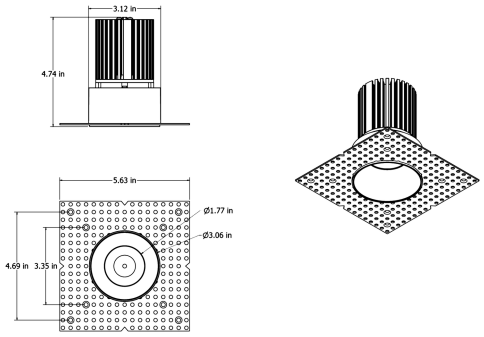

DL-LR-3-21W-R-XXX-XX-X-X-TL Leora 3in round with trimless

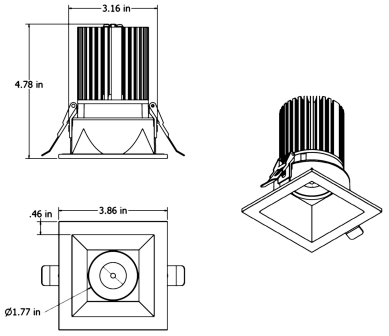


DL-LR-3-21W-S-XXX-XX-X-X-T Leora 3in square with trim

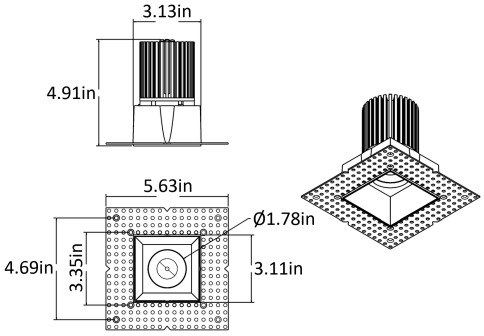


DL-LR-3-21W-S-XXX-XX-X-X-TL Leora 3in square with trimless

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.


Dimensions (continued)

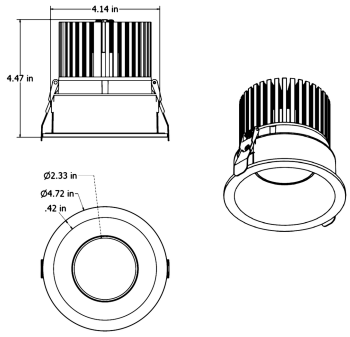


DL-LR-4-21W-R-XXX-XX-X-X-T Leora 4in round with trim

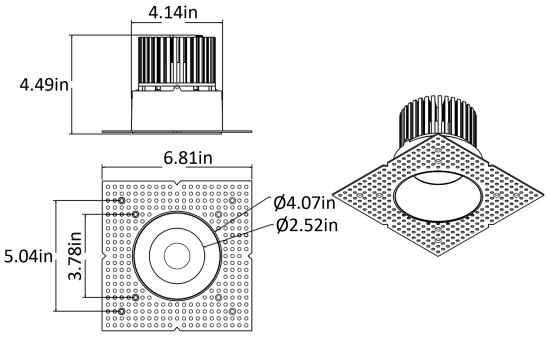


DL-LR-4-21W-R-XXX-XX-X-X-TL Leora 4in round with trimless

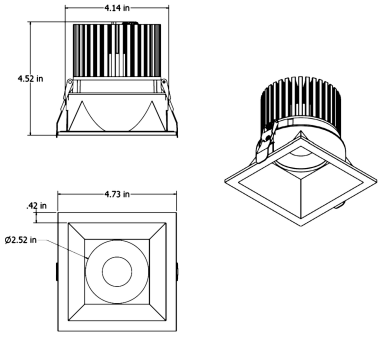


DL-LR-4-21W-S-XXX-XX-X-X-T Leora 4in square with trim

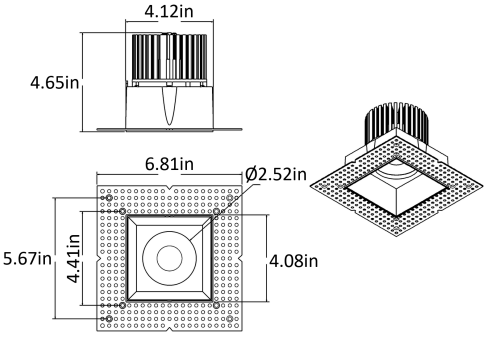

DL-LR-4-21W-S-XXX-XX-X-X-TL Leora 4in square with trimless

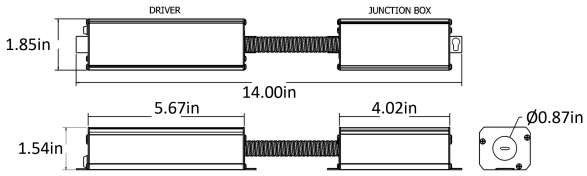

Leora 3in Driver

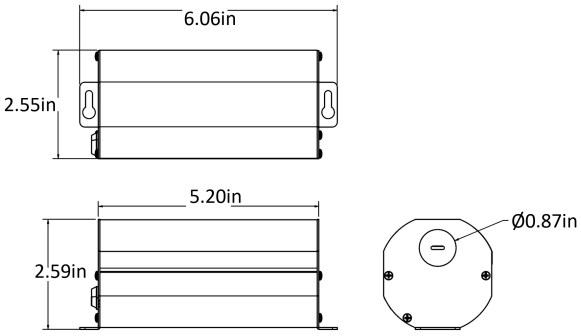

Leora 4in Driver

Cut-Out & Installation

Cut-out, round	**Ø 3.25 (3in) · Ø 4.25 (4in)**
Cut-out, square	**3.25x3.25 (3in) · 4.25x4.25 (4in)**
Junction box	**Included as standard**
Fixing	**Spring-action clips**

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.

Mounting Accessories

Trim & Reflector Options



Matte White

Round Reflector & Trim



Matte Black

Round Reflector & Trim



Matte Silver

Round Reflector & Trim



Matte Silver/White

Round Reflector & Trim




Matte White

Square Reflector & Trim




Matte Black

Square Reflector & Trim



Matte Silver

Square Reflector & Trim



Matte Silver/White

Square Reflector & Trim



Matte White

Round Reflector for Trimless




Matte Silver

Round Reflector for Trimless



Matte Black

Square Reflector for Trimless



Matte Silver

Square Reflector for Trimless



Matte White

Round trimless Trim



Matte White

Square trimless Trim



Matte White

Round Wall Wash Reflector for Trimless

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.

Mounting Accessories (continued)



Matte Black

Round Wall Wash Reflector for Trimless




Matte Silver

Round Wall Wash Reflector for Trimless

Accessories

BLD-HM08D-YYY	**Emergency LED driver, 8W**
BLD-HM15D-YYY	**Emergency LED driver, 15W**
BLD-HM25D-YYY	**Emergency LED driver, 25W**
Input voltage	**100-347**
Input power	**12W**
Power frequency	**50/60Hz**
Output voltage	**170V DC**
Output power	**8W · 15W · 25W**
Ambient	**0°C to 50°C · 30°F to 122°F**
Installation	**Remote**

UL listed for field and factory installation. Switches to emergency mode during a power failure and provides up to 90min of light; battery, charger and converter are integrated, and it delivers 8W, 15W or 25W constant power at 170V DC. Ideal for 0-10V dimmable indoor commercial LED fixtures, such as flat panels, troffers, downlights, and linear strip lights.

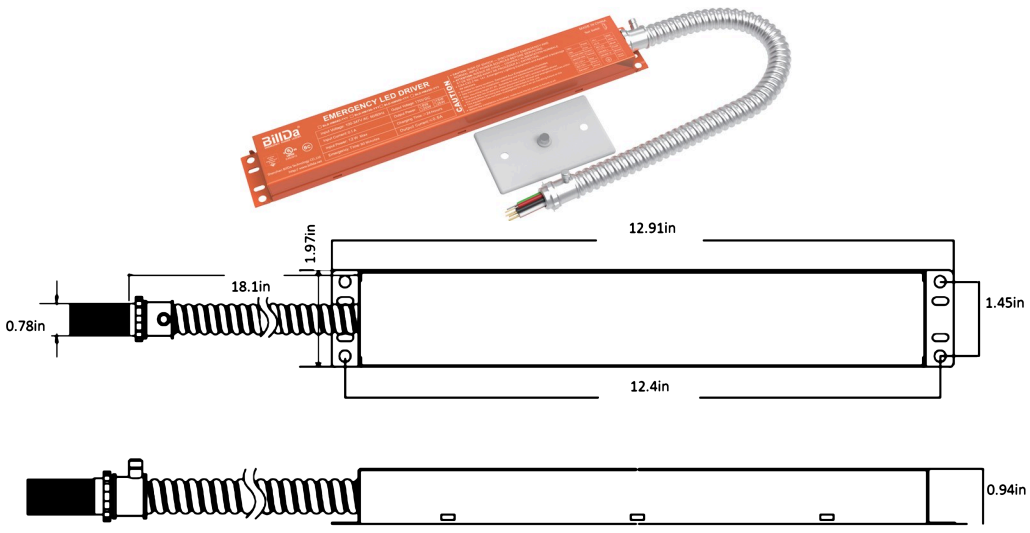

BLD-HM

All dimensions in inches. Accessories are ordered separately and field installed.

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.

Photometric Data

Lumen Estimate Adjustment Factors


2700K	× 1	3000K	× 1.03	3500K	× 1.09	4000K	× 1.11	5000	× 1.12

DL-LR-3-21W-X-5CCT-24

24°

Wattage	**12.2W**
CCT	**2700K**
Distribution	**32°**
Size	**3in**

ZONE	LUMENS	% FIXTURE
0-20°	**838.47**	**63.11**
0-30°	**1141.27**	**85.91**
0-40°	**1248.20**	**93.96**
0-60°	**1311.54**	**98.72**
0-80°	**1327.11**	**99.90**
0-90°	**1328.50**	**100.00**




DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**1252**	**1.0ft**	**1.0ft**
3.3ft	**332**	**1.9ft**	**1.9ft**
5.0ft	**145**	**2.9ft**	**2.8ft**
6.7ft	**80.6**	**3.9ft**	**3.8ft**
8.3ft	**52.5**	**4.8ft**	**4.7ft**
10.0ft	**36.2**	**5.8ft**	**5.6ft**
Vert. spread			**32.3°**
Horiz. spread			**31.5°**

DL-LR-3-21W-X-5CCT-24

24°

Wattage	**20W**
CCT	**2700K**
Distribution	**32°**
Size	**3in**

ZONE	LUMENS	% FIXTURE
0-20°	**1305.73**	**63.01**
0-30°	**1779.39**	**85.87**
0-40°	**1946.65**	**93.94**
0-60°	**2045.66**	**98.72**
0-80°	**2070.00**	**99.89**
0-90°	**2072.22**	**100.00**




DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**1943**	**1.0ft**	**1.0ft**
3.3ft	**516**	**1.9ft**	**1.9ft**
5.0ft	**225**	**2.9ft**	**2.8ft**
6.7ft	**125**	**3.8ft**	**3.8ft**
8.3ft	**81.5**	**4.8ft**	**4.7ft**
10.0ft	**56.2**	**5.7ft**	**5.7ft**
Vert. spread			**32.0°**
Horiz. spread			**31.8°**

DL-LR-3-21W-X-5CCT-38

38°

Wattage	**12.2W**
CCT	**2700K**
Distribution	**38°**
Size	**3in**

ZONE	LUMENS	% FIXTURE
0-20°	**873.07**	**61.61**
0-30°	**1245.48**	**87.90**
0-40°	**1352.26**	**95.43**
0-60°	**1403.19**	**99.03**
0-80°	**1415.85**	**99.92**
0-90°	**1417.00**	**100.00**



DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**1155**	**1.2ft**	**1.1ft**
3.3ft	**306**	**2.3ft**	**2.2ft**
5.0ft	**134**	**3.4ft**	**3.4ft**
6.7ft	**74.4**	**4.6ft**	**4.5ft**
8.3ft	**48.4**	**5.7ft**	**5.6ft**
10.0ft	**33.4**	**6.8ft**	**6.7ft**
Vert. spread			**37.7°**
Horiz. spread			**37.3°**

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.


Photometric Data

DL-LR-3-21W-X-5CCT-38

38°

Wattage	**20.1W**
CCT	**2700K**
Distribution	**38°**
Size	**3in**

ZONE	LUMENS	% FIXTURE
0-20°	**1361.36**	**61.55**
0-30°	**1943.44**	**87.87**
0-40°	**2110.23**	**95.41**
0-60°	**2190.01**	**99.02**
0-80°	**2209.90**	**99.92**
0-90°	**2211.74**	**100.00**




DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**1801**	**1.2ft**	**1.1ft**
3.3ft	**478**	**2.3ft**	**2.2ft**
5.0ft	**208**	**3.4ft**	**3.4ft**
6.7ft	**116**	**4.6ft**	**4.5ft**
8.3ft	**75.5**	**5.7ft**	**5.6ft**
10.0ft	**52.0**	**6.8ft**	**6.8ft**
Vert. spread			**37.8°**
Horiz. spread			**37.3°**

DL-LR-3-21W-X-5CCT-55

55°

Wattage	**12.1W**
CCT	**2700K**
Distribution	**53°**
Size	**3in**

ZONE	LUMENS	% FIXTURE
0-20°	**631.99**	**44.58**
0-30°	**1112.08**	**78.45**
0-40°	**1335.18**	**94.19**
0-60°	**1398.60**	**98.66**
0-80°	**1415.83**	**99.88**
0-90°	**1417.55**	**100.00**




DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**654**	**1.7ft**	**1.7ft**
3.3ft	**174**	**3.3ft**	**3.3ft**
5.0ft	**75.6**	**5.0ft**	**5.0ft**
6.7ft	**42.1**	**6.7ft**	**6.7ft**
8.3ft	**27.4**	**8.4ft**	**8.4ft**
10.0ft	**18.9**	**10.1ft**	**10.1ft**
Vert. spread			**53.4°**
Horiz. spread			**53.4°**

DL-LR-3-21W-X-5CCT-55

55°

Wattage	**20W**
CCT	**2700K**
Distribution	**53°**
Size	**3in**

ZONE	LUMENS	% FIXTURE
0-20°	**986.73**	**44.56**
0-30°	**1736.32**	**78.40**
0-40°	**2085.57**	**94.17**
0-60°	**2184.86**	**98.66**
0-80°	**2211.90**	**99.88**
0-90°	**2214.64**	**100.00**




DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**1020**	**1.7ft**	**1.7ft**
3.3ft	**271**	**3.3ft**	**3.3ft**
5.0ft	**118**	**5.0ft**	**5.0ft**
6.7ft	**65.7**	**6.7ft**	**6.7ft**
8.3ft	**42.8**	**8.3ft**	**8.3ft**
10.0ft	**29.5**	**10.0ft**	**10.1ft**
Vert. spread			**53.3°**
Horiz. spread			**53.4°**

DL-LR-4-30W-X-5CCT-24

24°

Wattage	**18.9W**
CCT	**2700K**
Distribution	**29°**
Size	**4in**

ZONE	LUMENS	% FIXTURE
0-20°	**1593.95**	**75.21**
0-30°	**1934.88**	**91.30**
0-40°	**2037.10**	**96.12**
0-60°	**2102.53**	**99.21**
0-80°	**2118.43**	**99.96**
0-90°	**2119.31**	**100.00**



DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**2605**	**0.9ft**	**0.9ft**
3.3ft	**691**	**1.7ft**	**1.7ft**
5.0ft	**301**	**2.6ft**	**2.6ft**
6.7ft	**168**	**3.5ft**	**3.5ft**
8.3ft	**109**	**4.4ft**	**4.3ft**
10.0ft	**75.3**	**5.3ft**	**5.2ft**
Vert. spread			**29.5°**
Horiz. spread			**29.3°**

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.


Photometric Data

DL-LR-4-30W-X-5CCT-24

24°

Wattage	**27.1W**
CCT	**2700K**
Distribution	**29°**
Size	**4in**

ZONE	LUMENS	% FIXTURE
0-20°	**2156.97**	**75.18**
0-30°	**2618.92**	**91.28**
0-40°	**2757.61**	**96.11**
0-60°	**2846.37**	**99.20**
0-80°	**2867.96**	**99.96**
0-90°	**2869.18**	**100.00**




DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**3521**	**0.9ft**	**0.9ft**
3.3ft	**934**	**1.7ft**	**1.7ft**
5.0ft	**407**	**2.6ft**	**2.6ft**
6.7ft	**227**	**3.5ft**	**3.5ft**
8.3ft	**148**	**4.4ft**	**4.3ft**
10.0ft	**102**	**5.3ft**	**5.2ft**
Vert. spread			**29.5°**
Horiz. spread			**29.3°**

DL-LR-4-30W-X-5CCT-38

38°

Wattage	**18.8W**
CCT	**2700K**
Distribution	**35°**
Size	**4in**

ZONE	LUMENS	% FIXTURE
0-20°	**1332.96**	**65.47**
0-30°	**1789.73**	**87.90**
0-40°	**1915.42**	**94.08**
0-60°	**2016.07**	**99.02**
0-80°	**2034.91**	**99.95**
0-90°	**2036.01**	**100.00**




DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**1810**	**1.1ft**	**1.1ft**
3.3ft	**480**	**2.1ft**	**2.1ft**
5.0ft	**209**	**3.1ft**	**3.1ft**
6.7ft	**117**	**4.2ft**	**4.2ft**
8.3ft	**75.9**	**5.2ft**	**5.2ft**
10.0ft	**52.3**	**6.3ft**	**6.3ft**
Vert. spread			**34.8°**
Horiz. spread			**34.9°**

DL-LR-4-30W-X-5CCT-38

38°

Wattage	**27.1W**
CCT	**2700K**
Distribution	**35°**
Size	**4in**

ZONE	LUMENS	% FIXTURE
0-20°	**1806.46**	**65.49**
0-30°	**2425.05**	**87.92**
0-40°	**2595.04**	**94.08**
0-60°	**2731.21**	**99.02**
0-80°	**2756.76**	**99.95**
0-90°	**2758.26**	**100.00**




DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**2452**	**1.1ft**	**1.1ft**
3.3ft	**651**	**2.1ft**	**2.1ft**
5.0ft	**283**	**3.1ft**	**3.2ft**
6.7ft	**158**	**4.2ft**	**4.2ft**
8.3ft	**103**	**5.2ft**	**5.2ft**
10.0ft	**70.9**	**6.3ft**	**6.3ft**
Vert. spread			**34.8°**
Horiz. spread			**35.0°**

DL-LR-4-30W-X-5CCT-55

55°

Wattage	**19W**
CCT	**2700K**
Distribution	**55°**
Size	**4in**

ZONE	LUMENS	% FIXTURE
0-20°	**743.85**	**37.60**
0-30°	**1357.00**	**68.60**
0-40°	**1761.25**	**89.03**
0-60°	**1939.86**	**98.06**
0-80°	**1976.03**	**99.89**
0-90°	**1978.24**	**100.00**



DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**818**	**1.8ft**	**1.8ft**
3.3ft	**217**	**3.5ft**	**3.5ft**
5.0ft	**94.6**	**5.3ft**	**5.2ft**
6.7ft	**52.7**	**7.1ft**	**7.0ft**
8.3ft	**34.3**	**8.8ft**	**8.7ft**
10.0ft	**23.6**	**10.5ft**	**10.5ft**
Vert. spread			**55.6°**
Horiz. spread			**55.2°**

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.


Photometric Data

DL-LR-4-30W-X-5CCT-55

55°

Wattage	**27.1W**
CCT	**2700K**
Distribution	**55°**
Size	**4in**

ZONE	LUMENS	% FIXTURE
0-20°	**1002.89**	**37.58**
0-30°	**1829.30**	**68.55**
0-40°	**2375.30**	**89.01**
0-60°	**2616.74**	**98.05**
0-80°	**2665.69**	**99.89**
0-90°	**2668.71**	**100.00**




DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**1102**	**1.8ft**	**1.8ft**
3.3ft	**292**	**3.5ft**	**3.4ft**
5.0ft	**127**	**5.3ft**	**5.2ft**
6.7ft	**71.0**	**7.1ft**	**7.0ft**
8.3ft	**46.2**	**8.8ft**	**8.7ft**
10.0ft	**31.9**	**10.6ft**	**10.4ft**
Vert. spread			**55.6°**
Horiz. spread			**55.2°**

DL-LR-3-21W-X-5CCT-WW

Wall wash

Wattage	**12.1W**
CCT	**2700K**
Distribution	**53°**
Size	**3in**

ZONE	LUMENS	% FIXTURE
0-20°	**170.41**	**23.26**
0-30°	**335.86**	**45.84**
0-40°	**496.71**	**67.80**
0-60°	**679.78**	**92.79**
0-80°	**729.92**	**99.63**
0-90°	**732.63**	**100.00**




DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**169**	**1.9ft**	**1.5ft**
3.3ft	**44.9**	**3.7ft**	**2.8ft**
5.0ft	**19.6**	**5.7ft**	**4.3ft**
6.7ft	**10.9**	**7.6ft**	**5.8ft**
8.3ft	**7.10**	**9.4ft**	**7.1ft**
10.0ft	**4.89**	**11.4ft**	**8.6ft**
Vert. spread			**59.2°**
Horiz. spread			**46.5°**

DL-LR-3-21W-X-5CCT-WW

Wall wash

Wattage	**20W**
CCT	**2700K**
Distribution	**53°**
Size	**3in**

ZONE	LUMENS	% FIXTURE
0-20°	**260.59**	**23.19**
0-30°	**513.81**	**45.73**
0-40°	**760.29**	**67.67**
0-60°	**1041.85**	**92.73**
0-80°	**1119.35**	**99.63**
0-90°	**1123.56**	**100.00**




DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**259**	**1.9ft**	**1.5ft**
3.3ft	**68.6**	**3.7ft**	**2.8ft**
5.0ft	**29.9**	**5.7ft**	**4.3ft**
6.7ft	**16.6**	**7.6ft**	**5.8ft**
8.3ft	**10.8**	**9.4ft**	**7.1ft**
10.0ft	**7.47**	**11.3ft**	**8.6ft**
Vert. spread			**59.1°**
Horiz. spread			**46.5°**

DL-LR-4-30W-X-5CCT-WW

Wall wash

Wattage	**19.1W**
CCT	**2700K**
Distribution	**57°**
Size	**4in**

ZONE	LUMENS	% FIXTURE
0-20°	**257.65**	**20.77**
0-30°	**516.81**	**41.66**
0-40°	**780.06**	**62.89**
0-60°	**1124.36**	**90.64**
0-80°	**1230.54**	**99.20**
0-90°	**1240.44**	**100.00**



DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**253**	**2.1ft**	**1.7ft**
3.3ft	**67.1**	**4.0ft**	**3.2ft**
5.0ft	**29.2**	**6.1ft**	**4.9ft**
6.7ft	**16.3**	**8.2ft**	**6.6ft**
8.3ft	**10.6**	**10.1ft**	**8.2ft**
10.0ft	**7.31**	**12.2ft**	**9.8ft**
Vert. spread			**62.7°**
Horiz. spread			**52.3°**

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.


Photometric Data

DL-LR-4-30W-X-5CCT-WW

Wall wash

Wattage	**27.6W**
CCT	**2700K**
Distribution	**57°**
Size	**4in**

ZONE	LUMENS	% FIXTURE
0-20°	**339.73**	**20.79**
0-30°	**681.29**	**41.68**
0-40°	**1028.06**	**62.90**
0-60°	**1481.43**	**90.64**
0-80°	**1621.30**	**99.20**
0-90°	**1634.41**	**100.00**



DISTANCE	CENTER Fc	BEAM WIDTH	
1.7ft	**334**	**2.1ft**	**1.7ft**
3.3ft	**88.5**	**4.0ft**	**3.2ft**
5.0ft	**38.6**	**6.1ft**	**4.9ft**
6.7ft	**21.5**	**8.1ft**	**6.6ft**
8.3ft	**14.0**	**10.1ft**	**8.2ft**
10.0ft	**9.64**	**12.2ft**	**9.8ft**
Vert. spread			**62.6°**
Horiz. spread			**52.3°**

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.

Sensor & Dimming

Bluetooth Sensors ARIA PLUS · BLE

Ceiling sensors with power pack

Product	Detection type	Detection range	Bluetooth range	Dimming protocol	Compatible power pack  PPA102S 720W 120–277V	 PPA104S.B1 2400W 120–277V
 **EFS107E** Surface mount Daisy chain	PIR Ultrasonic	64ft	200ft	0-10V Dimming	●	●

Non-Bluetooth Sensors set up by IR remote

Product	Detection type	Detection range	Set-up	Dimming protocol	Installation
 **Detecta** AE-CT-DT806	PIR Microphonics	9.8–32.75ft	IR remote	On/Off	Ceiling · no power pack
Remote control RC102					

Please refer to spec sheet for exact specifications for all items above.

Dimmer List

Dimmer Compatibility — 0-10V

Leviton	**IP710-DLZ**
Leviton	**IP710-LFZ**
Leviton	**DS710-10Z**
Lutron	**NFTV-WH**
Lutron	**NTSTV-DV-WH**
Lutron	**DVSTV-WH**
Lutron	**DVTV-WH**
Lutron	**MS-Z101-WH (5% min Dim)**
LEGRAND	**CD4FBL3P**

Compatibility verified by Eralux at time of publication. For dimmers not listed, contact the factory.

© ERALUX Inc. All rights reserved. Information is subject to change without notice. All values are typical values measured under normal laboratory conditions.